


# ABS/PC

## Acrylonitrile Butadiene Styrene Polycarbonate

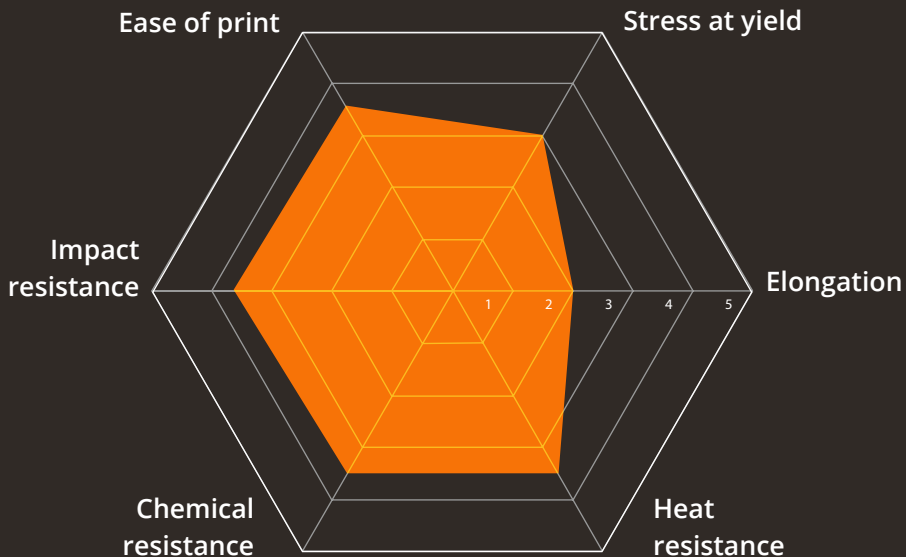

ABS/PC blend combines the properties of PC and ABS, in other words the high processing capacity of ABS with excellent mechanical properties, resistance to heat and impact, from the PC. The level of the two components affects the heat resistance.

Applications: Enclosures for professional machines, Electrical applications, Dashboards, Hubcaps, etc.

Melt T° range: 220 - 305°C

Max T° of use: 130°C