


# PLA Woodfill

Poly(lactic acid)

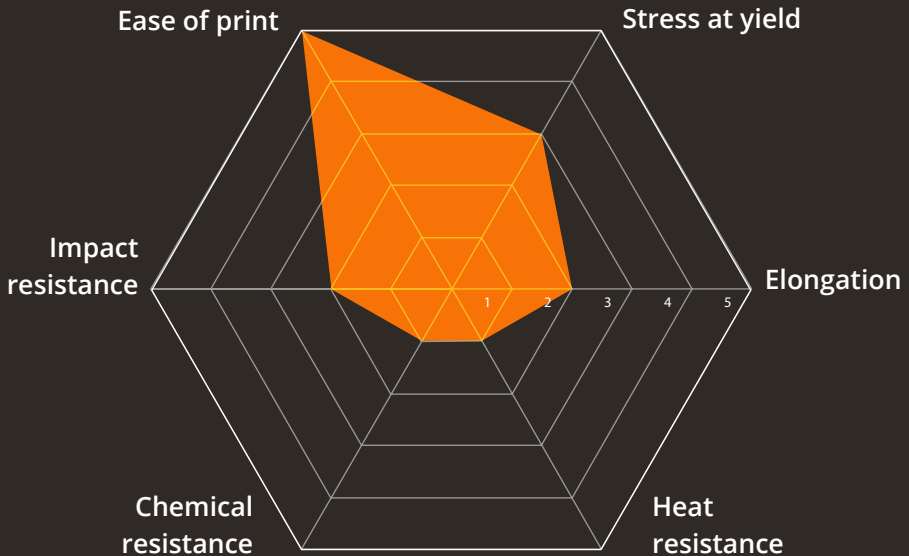

PLA is a semi-crystalline bio-based polymer obtained from renewable resources. It is a copolyester massively used in 3D printing for prototypes fabrication. Wood fiber filled PLA presents a nice woody aspect. Many other types of filling exist.

Applications: Prototypes, Food packaging, Medical devices (cellular scaffolds, stents).

Melt T° range: 180 - 260°C

Max T° of use: 65 - 80°C

[www.pollen.am](http://www.pollen.am)

**pollen**   
your chemistry inside