


PA-6

Polyamide 6

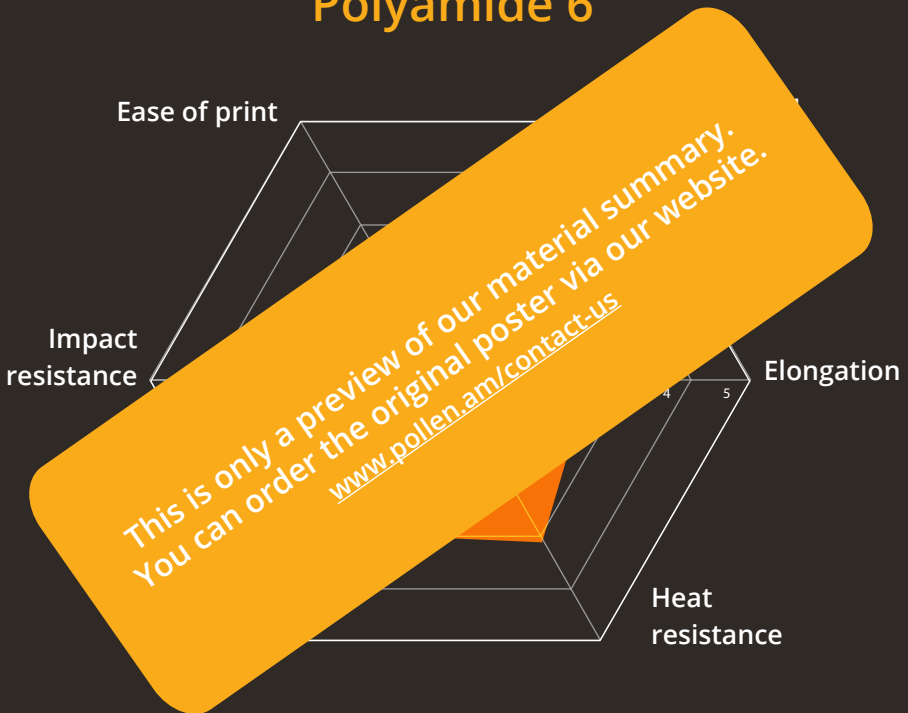

Polyamide 6 also called polycaprolactam, is a semi-crystalline thermoplastic. PA6 is used for the production of technical parts requiring good mechanical resistance. It has a low coefficient of friction, good thermal resistance and electrical insulation properties.

Applications: Gears, Fittings and bearings, Automotive industry for the underlying parts, Electrical boxes, etc.

Melt T° range: 180 - 300°C

Max T° of use: 160 - 200°C